

EKL4E Series 18mm Polyamide Terminal Strip

Wire Entry	25mm ² (8-4 AWG)
Nominal Voltage	750V (UL 600V)
UL Amp Rating	85A
PA 6.6 Max Ambient Temp	T 110
PA 6.6 FR Max Ambient Temp	T 140
PA 6.6 Testing Temp EN60998	140°C
PA 6.6 FR Testing Temp EN60998	170°C
Inserts	Brass
Screws	Galvanized Steel M5
Recommended Torque	15lb-in
Major Approvals	UL, CSA, VDE, OVE, SEMCO

ORDERING INSTRUCTIONS:

Insert Number of Poles from 2-12

Without Wire Protectors:

EKL4E/_ _W-ETB

Flame Retardant PA 6.6 FR UL94V0 Brown w/o WP:


EKL4E/_ _WFR-ETB

Contact EuroComp for Options:

Printing

Marking Plates

Galvanized Inserts

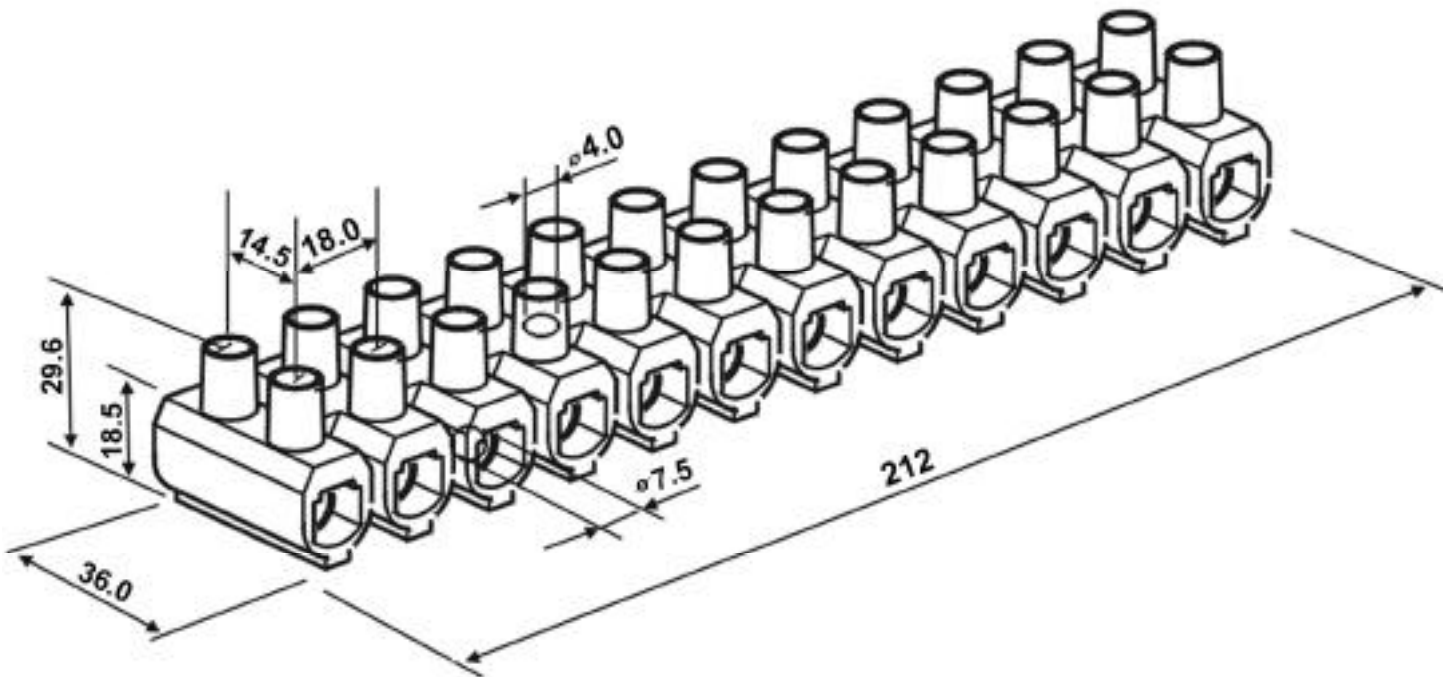

EuroComp, Inc.

(800) 846-6777 - Fax (949) 650-2992

www.eurocomp.net - email: sales@eurocomp.net